


# Quick-Start Guide

## IRLinc™ Receiver – IR to INSTEON® Converter

Model: 2411R

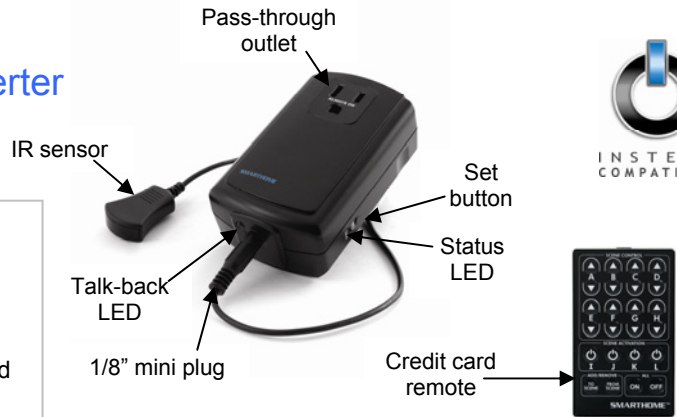

### Introduction

Converts infrared (IR) signals from an included credit card remote and/or a universal IR remote into INSTEON signals. IRLinc is compatible with most universal IR remote controls that come pre-programmed with codes to support many different audio-video products. Controls up to 12 scenes/devices from the tiny credit card remote or even more from a universal remote.

### Installation

- 1) Mount the IR sensor where it will be in the line of sight of the IR remote you plan to use. Be sure to mount the sensor within 6 feet of an outlet, unless you plan to use an extension cord to power IRLinc.
- 2) Plug IRLinc into an unswitched wall outlet
- 3) Plug the IR sensor's mini-plug into the jack on the bottom of IRLinc
- 4) If you are using a universal remote, see the Owner's Manual for further installation and Linking instructions. If you are using the included credit card remote, remove its battery isolation tab and proceed to *Linking IRLinc Receiver as a Controller*
- 5) OPTIONAL: You can use the pass-through outlet on the front of IRLinc as you would an ordinary uncontrolled wall outlet. However, do not plug another home automation product into this outlet.

### Using the Credit Card Remote

#### Scene Control Buttons

These buttons are pre-paired with each other, such that when you Link an INSTEON device to the Up arrow, the Down arrow will also control that device.

- Tap the Up arrow to activate the scene
- Tap the Down arrow to deactivate the scene
- Press & hold the Up arrow to brighten the scene
- Press & hold the Down arrow to dim the scene

#### Scene Activation Buttons

These buttons provide smooth and simple scene transitions for when a scene doesn't need an OFF command

- Tap to easily trigger a scene
- Press & hold to toggle between brightening or dimming the scene

#### All On/Off Buttons

These buttons automatically control all devices Linked to any scene in IRLinc for quick, whole-home control

- Tap the On button to turn on all devices Linked to IRLinc
- Tap the Off button to turn off all devices Linked to IRLinc

#### Add/Remove Buttons

These buttons save time by putting IRLinc into Linking / Unlinking Mode without the need to press & hold the Set button on IRLinc itself

- Press & hold the To Scene button for 3 seconds to put IRLinc into Linking Mode
- Press & hold the From Scene button for 3 seconds to put IRLinc into Unlinking Mode



### Linking IRLinc as a Controller

- 1) On the credit card remote, press & hold the To Scene button for 3 seconds  
*The blue IRLinc Status LED should flash once*
- 2) Point the credit card remote at IRLinc from a distance of 6 inches or more and tap the button you want to be learned  
*The blue IRLinc Status LED should begin blinking*
- 3) Press & hold the Responder's Set button for 3 seconds  
*The blue IRLinc Status LED should stop blinking and turn on solid*
- 4) Confirm that Linking was successful by tapping the button you just Linked to on the remote  
*The Responder should respond appropriately*

### Complete Instructions, Troubleshooting, and Tech Support

Owner's Manual: [www.smarthome.com/manuals/2411R.pdf](http://www.smarthome.com/manuals/2411R.pdf)

Call: INSTEON Gold Support Line at 800-762-7845

\*Setup Modes will automatically time out after 4 minutes.